

Biofeedback V3DRealTime

VISUAL3D SERVER HAS BEEN REPLACED BY THE [VISUAL3D PLUGINS](#)

Purpose

This tutorial shows you how to generate real time feedback from the Visual3D RealTime Tab when streaming from Visual3DServer. The pictures and example in this tutorial are specific to streaming a C3D file through Visual3DServer. However, the same principles can be applied to any plugin which supplies marker or force plate data. To run biofeedback through Visual3D with a C3D file without using Visual3D Server use [this tutorial](#).

Steps

1. Making sure Visual3DServer is running

The Server may either be streaming a c3d file as described in the [C3D set up tutorial](#) or it may be receiving data from one of the following plugins:

- AMTI
- AMTI Type 6
- Bertec
- [Mac Cortex](#)
- NP Motive
- NDI First Principles
- NP OptiTrack
- [Qualisys](#)
- Vicon

2. Making sure you have the files you need

Before beginning this tutorial if you are following from the C3D tutorial make sure that you have:


1. Downloaded the file [model.zip](#)
2. Saved the file to where you would normally save motion capture files and unzip it.
3. Make sure that you have both Walking_Hybrid_2.c3d and model.cmo

These sample Qualisys files were downloaded from [C3D.org](#).


If you are streaming your own pre-recorded data or a live subject make sure that you have a model file (saved as a .cmo) built and ready to apply.

3. Open Visual3D

1. Launch Visual3D.
2. From the File menu, select **Open/Add...** and choose *model.cmo*
3. From the workspace status screen, verify the model file named *Standing_Hybrid_2.c3d* appears in the column labelled *Models/Calibration Files*.

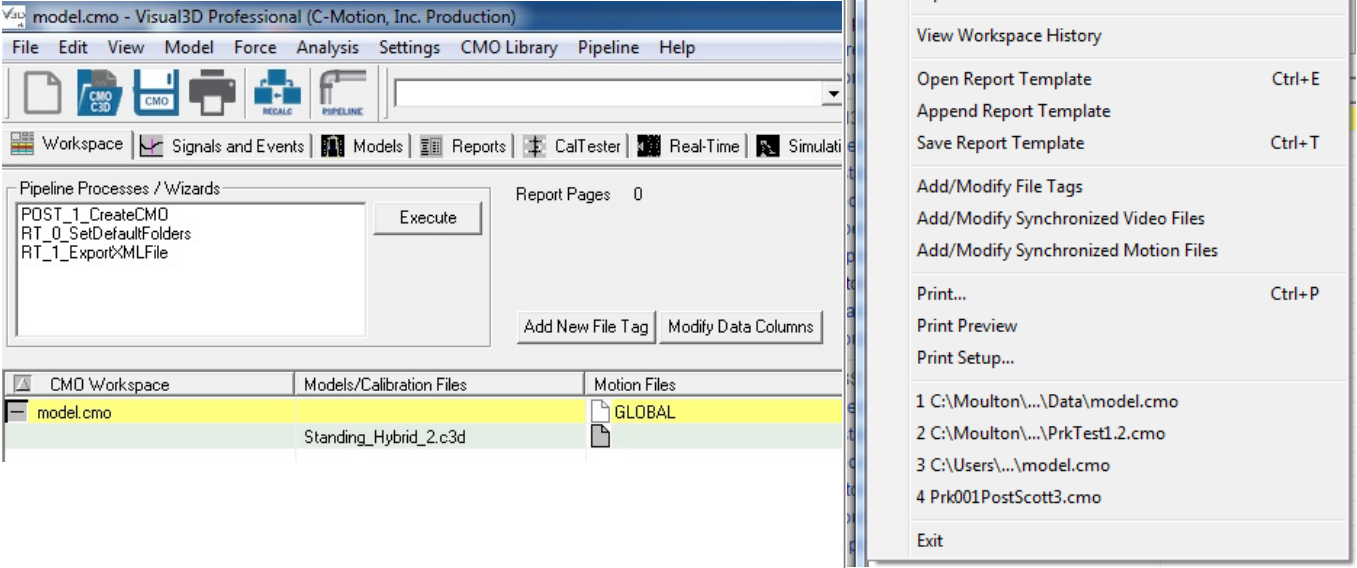

3. Switch to the **Models** tab to verify bones in picture

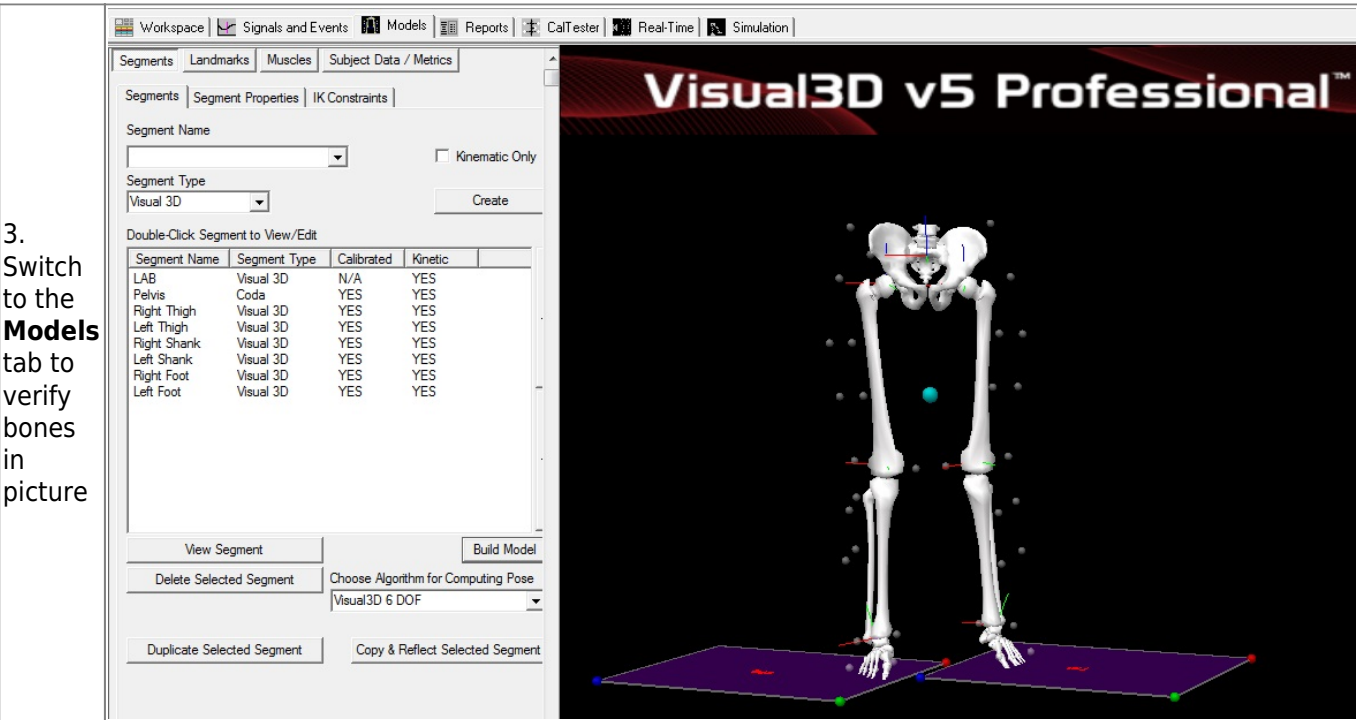

4. Connect to RealTime stream

1. Open the Real-Time tab in Visual3D.

2. Select *External RT* radio button. "Connect to Visual3DServer" will be shown in animation window.

3. Make sure that the IP of the computer running Visual3DServer is entered into the IP Dialogue Box. If Server is being run on the same computer as Visual3D then localhost or 127.0.0.1 can be used as a short cut. If you need help finding your computer's IP address see the [Trouble Shooting section](#).


4. Click the connect button.

5. C3D should appear in the Available Systems box. Select C3D and click on the top set of arrows in order to transfer C3D to the Selected Systems box.

Available systems (0):


☐ Add system prefix for single system

6. There should now be marker and force plate data in the animation window.

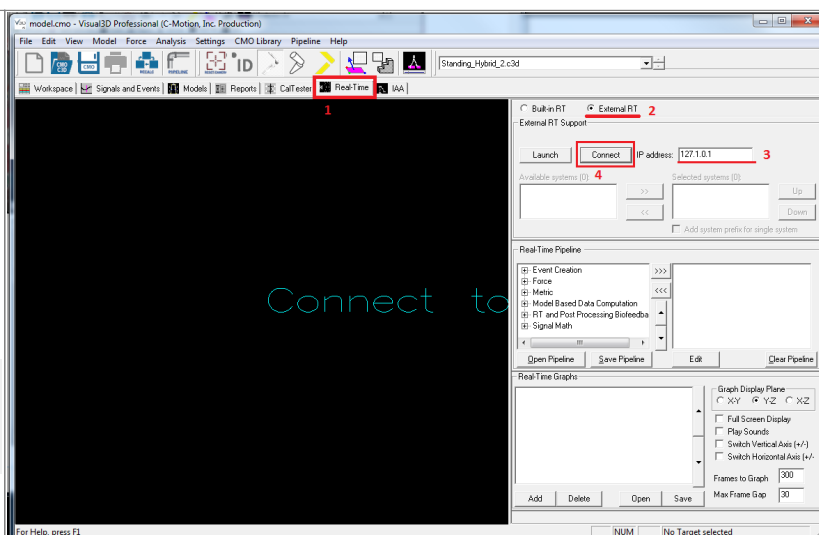


5. Creating a Pipeline and Graph

This tutorial will cover creating a simple graph for the Left Knee Angle. If you would like a detailed explanation of all the available pipeline commands available click [here](#) [link]. If you would like a detailed explanation of the options for customizing a graph click [\[here\]](#).

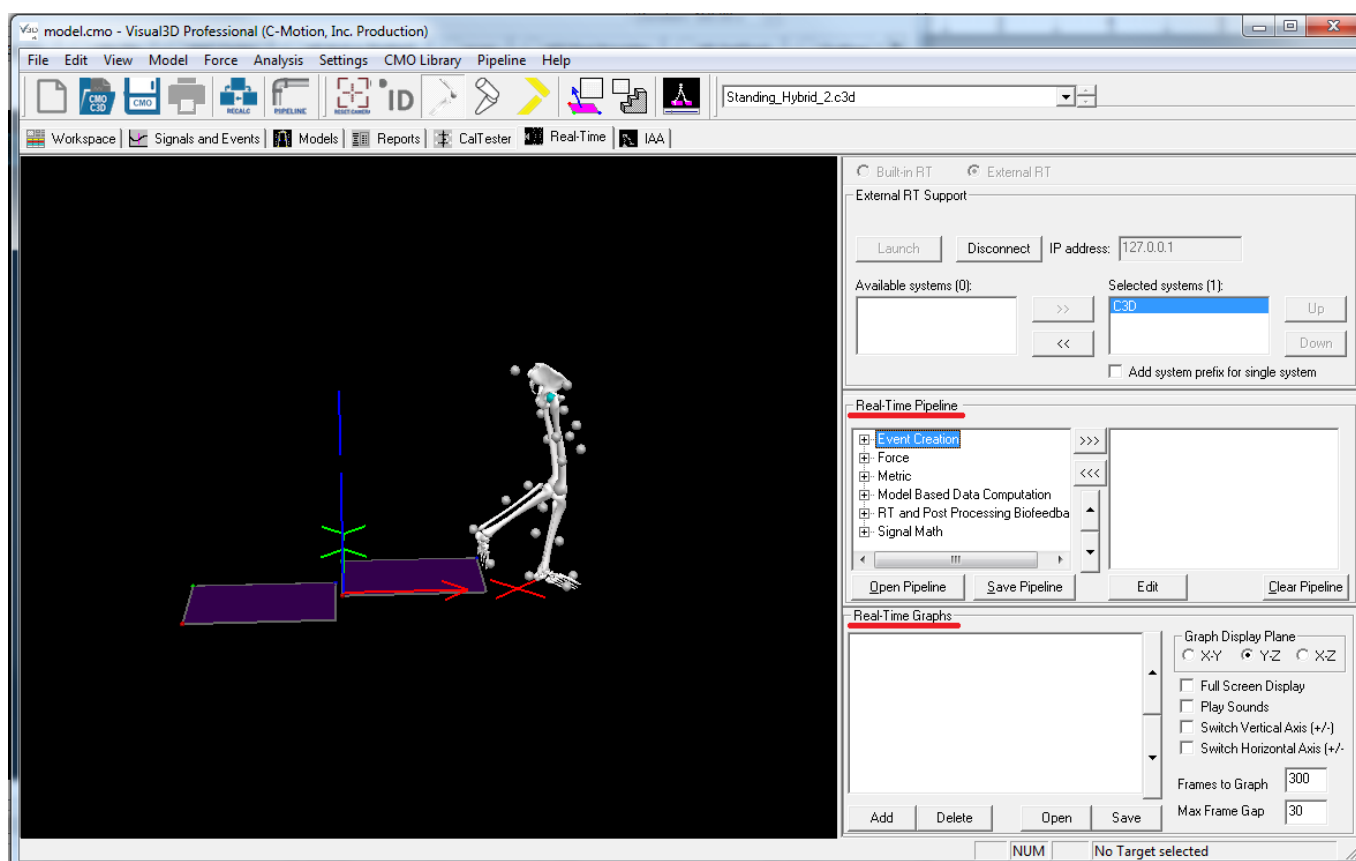

1. Expand the Model Based Data Computations category in the list of pipeline options.

2. Select `Compute_Model_Based_Data` and use the top set of arrows to move the command to the pipeline builder window.

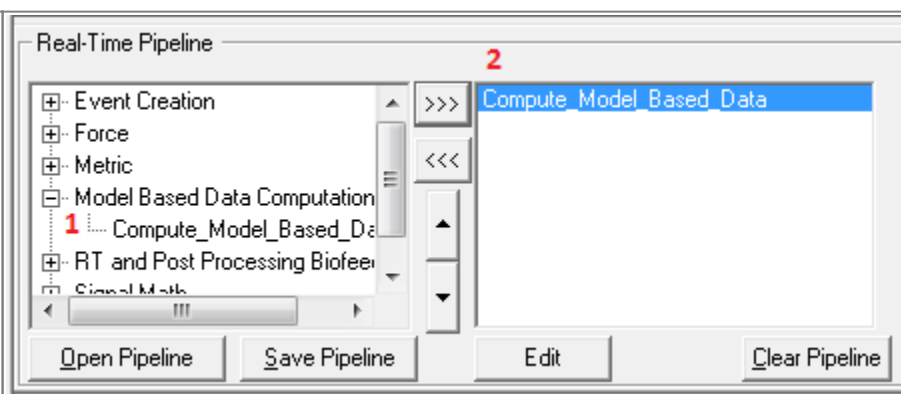


3. Either double click on `Compute_Model_Based_Data` in the pipeline window or select it and click on Edit, which is located at the bottom left of the pipeline window. This will open the `Compute_Model_Based_Data` dialogue box.

4. From the Model Based Item Properties drop down box select `JOINT_ANGLE`.

5. Set the Segment to LSK and the Reference Segment to LTH. This will compute the left knee joint angle by calculating the angle between the Left Shank (LSK) and the Left Thigh (LTH).

6. Select the Data Name dialogue box and type in `Left_Knee_Angle`.

7. Click Done.

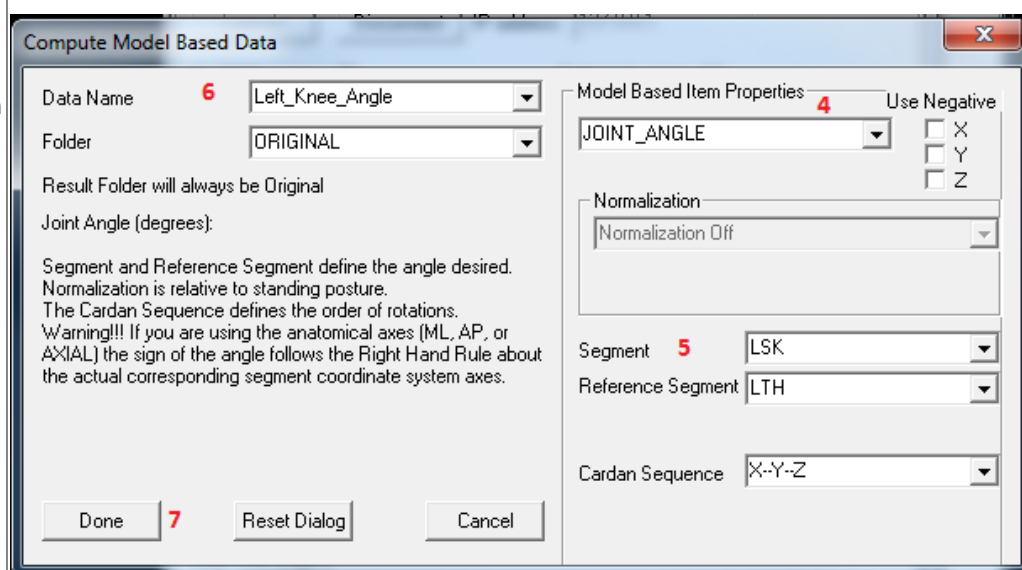

8. Click on the Add button at the bottom left corner of the Real-Time Graphs section.

9. Make sure that the 2D Graph tab is selected at the top of the dialogue box.

10. In the Data to drop down menu select LINK_MODEL_BASED::Left_Knee_Angle.

11. Click on OK.

Add/Modify Real-Time Feedback

Graph Type: ☐ No Graph ☒ 2D Graph ☐ Bar Chart

Data to: LINK_MODEL_BASED::ORIGINAL::Left_Knee_Angle 10

Component: X Line Color: White

☐ Graph P2D StdDev Component

Graph Position: Column: 1 Span: 1 Row: 1 Span: 1

☒ Automatically Scale to Signal Min/Max ☐ Scale Graph to User Defined Min/Max

☐ Highlight Target Range 0 +_ 0

☐ Highlight Metric Mean ☐ Highlight Metric StdDev

Event Handling

☐ Anchor Graph Start Frame on Event ☐ Anchor Graph Stop Frame on Event

☐ Update Graph Every Nth Cycle 1

Number of Cycles to Display 4

Select Events to Annotate: LHS, LOFF, LON, LTO, RHS

Warning Data Color. NOTE: If 'Less Than' equals 'Greater Than' then there is no warning given.

	Less Than	Greater Than	Also Change Background Color to
Warn Yellow When:	0	0	Default
Warn Red When:	0	0	Default
Warn Sound When:	0	0	Default

Sound File (Less than):

Sound File (Greater Than):

☐ Only Graph ☐ Graph Border


OK **11** Cancel

6. Inspect Output

Below is a sample of what you should see.

Note: you may need to reorient the 3D View to see the graph well.

If you wish to see your options for customizing the graph click here [\[link\]](#), if you would like to graph other variables click here [\[link\]](#).

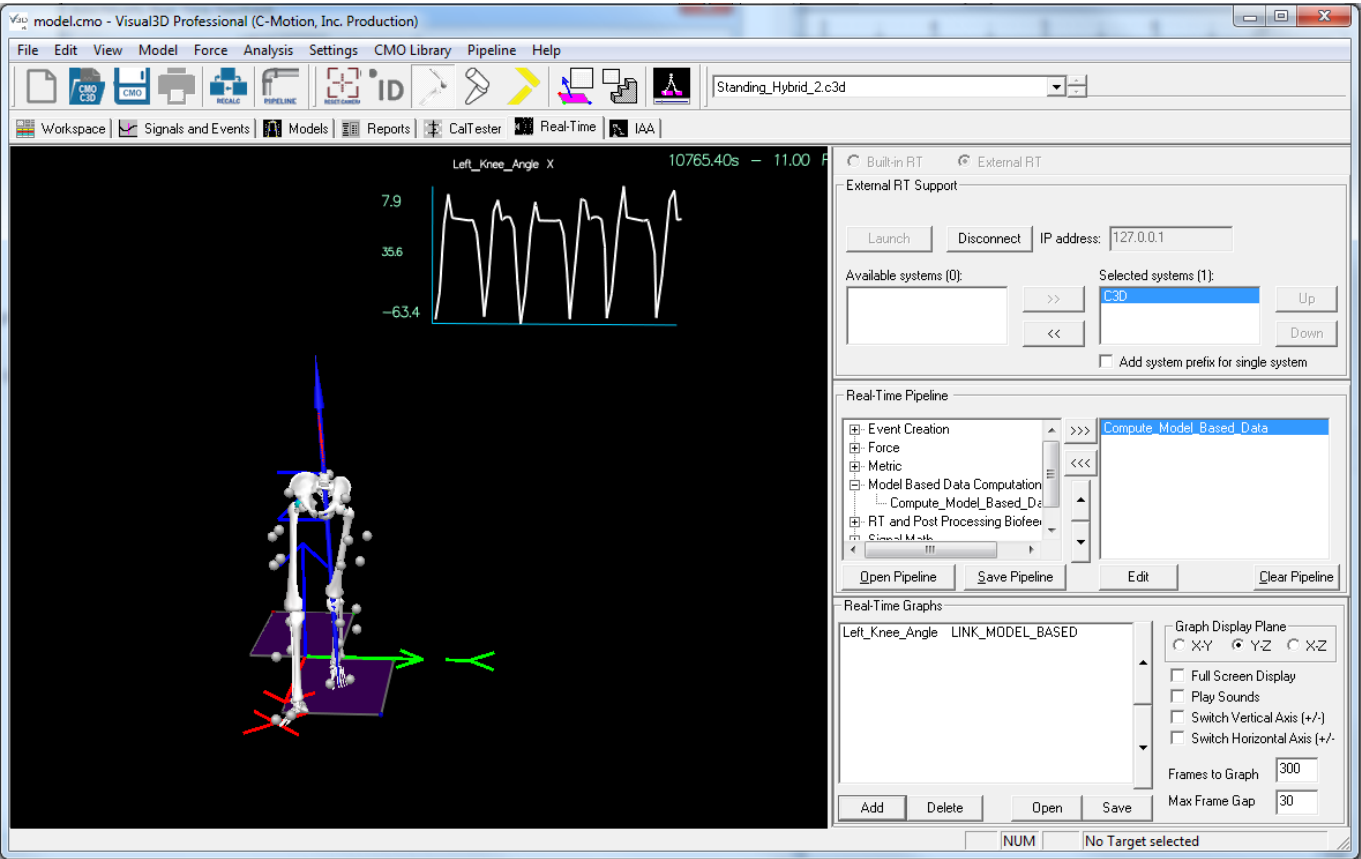

From:
<https://has-motion.com/wiki/> - Wiki Documentation Site

Permanent link:
https://has-motion.com/wiki/doku.php?id=other:visual3dserver:tutorials:biofeedback_v3drealtime

Last update: 2024/07/17 15:44

