

IOR Gait Full Body Model

This tutorial explains how to implement the IOR Full Body Model in Visual3D.

The IOR Full Body Model is a combination of the IOR Multi-Segment Trunk, and the IOR Lower Extremity Model.

The naming convention in this tutorial follows Serge Van Sint Jan's convention.

Downloads

Sample files may be downloaded [here](#).

The zip file contains:

1. C3D files which you can use to follow along with the tutorial
2. A model template which contains the landmark & segment definitions
3. A script which contains the planar & joint angle definitions
4. A report template which plots the relevant kinematics (joint angles & planar angles)
5. A completed CMO file

Target Placement

LCAJ/RCAJ (LA/RA): Left/Right acromion

SJN (IJ): Deepest point of the incisura jugularis

SXS (PX): Xiphoid process, i.e. most caudal point of the sternum

CV7 (C7): Spinous process of the seventh cervical vertebrae

TV2 (T2): Second thoracic vertebrae

TV7 (MAI): Midpoint between the inferior angles of the most caudal points of the two scapulae

LV1, LV3, LV5 (L1, L3, L5):

First, third and fifth lumbar vertebrae

LIAS/RIAS (LASIS/RASIS):

Left/Right anterior superior iliac spine

LIPS/RIPS (LPSIS/RPSIS):

Left/Right posterior superior iliac spine

LFTE/RFTE (LGT/RGT): Most lateral prominence of the greater trochanter

LFLE/RFLE (LLE/RLE): Most medial prominence of the medial femoral epicondyle

LFME/RFME (LME/RME): Most medial prominence of the medial femoral epicondyle

LFAX/RFAX (LHF/RHF): Proximal tip of the head of the fibula

LTTC/RTTC (TT/RTT): Most anterior border of the tibial tuberosity

LFAL/RFAL (LLM/RLM): Lateral prominence of the lateral malleolus


LTAM/RTAM (LMM/RMM): Most medial prominence of the medial malleolus

LFCC/RFCC (LCA/RCA): Aspect of the Achilles tendon insertion on the calcaneus

LFM1/RFM1 (LFM/RFM): Dorsal margin of the first metatarsal head

LFM2/RFM2 (LSM/RSM): Dorsal aspect of the second metatarsal head


LFM5/RFM5 (LVM/RVM): Dorsal margin of the fifth metatarsal head

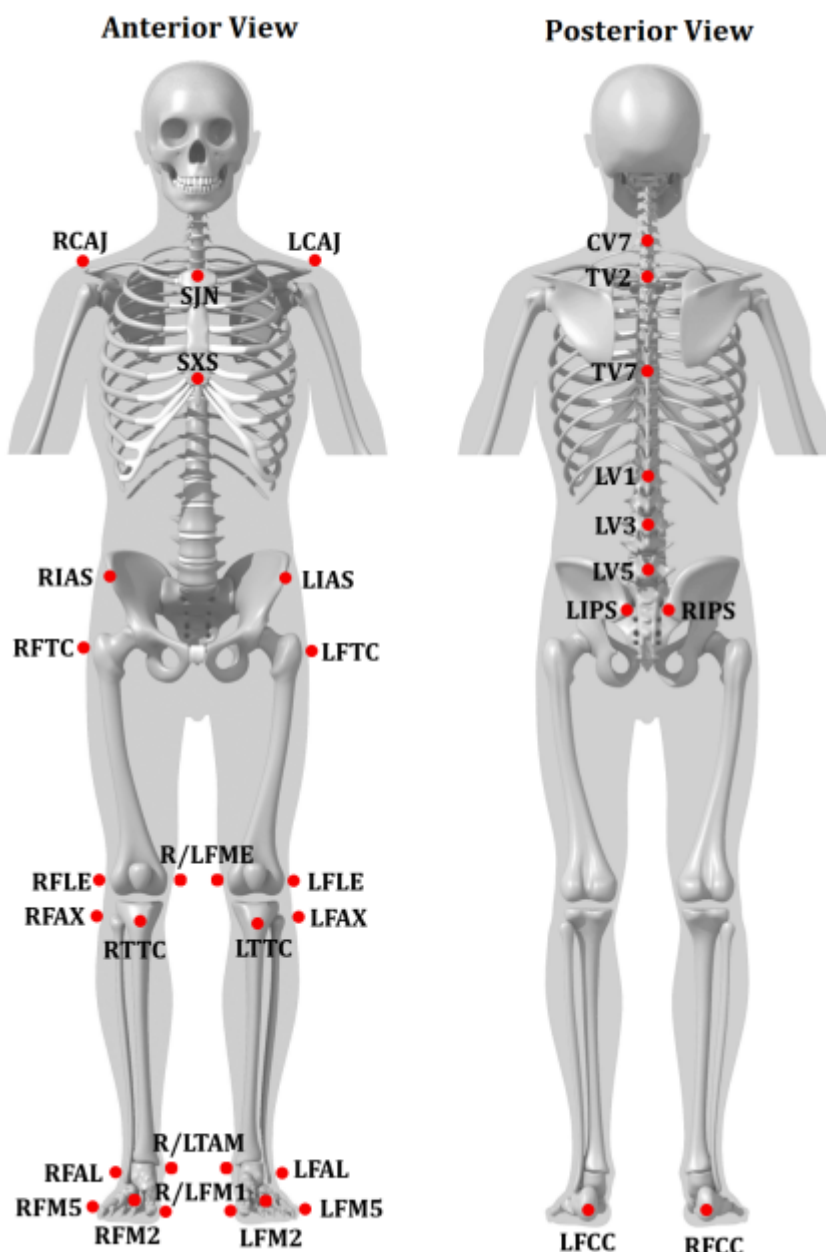

Segment Definitions

Pelvis

The pelvis segment coordinate system is consistent with the [CODA pelvis](#), from which the Left and Right Hip Joint centers are automatically created.

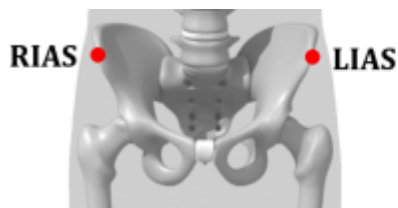

LIAS/RIAS (LASIS/RASIS): Left/Right anterior superior iliac spine

LIPS/RIPS (LPSIS/RPSIS): Left/Right posterior superior iliac spine

Pelvis Landmarks

1. Create SCRM:

1. Click **Landmarks** button
2. Click **Add New Landmark** button
3. Create Landmark: SCRM
 - **Landmark Name:** SCRM
 - **Define Orientation Using:**
 - **Starting Point:** RIPS
 - **Ending Point:** LIPS
4. Offset Using the Following **ML/AP/AXIAL** Offsets:
 - **X:** 0.0 **Y:** 0.0 **Z:** 0.5
5. **Check:** Offset by Percent (1.0 = 100%)
6. **Check:** Calibration Only Landmark


Pelvis Definition

2. Create Pelvis Segment:

The screenshot shows the 'Pelvis' dialog box in a software application. The dialog has several tabs: 'Segments', 'Landmarks', 'Muscles', 'Subject Data / Metrics', 'Segment Properties', 'IK Constraints', and 'Pelvis'. The 'Pelvis' tab is currently selected. Inside the dialog, there are several sections for configuring the pelvis segment. The 'Define Segment Type' section has a dropdown menu set to 'CODA'. The 'Subject Name Prefix' section has a text input field. The 'Define Calibration Signals' section has four dropdown menus: 'R.ASIS' set to 'RIAS', 'L.ASIS' set to 'LIAS', 'R.PSIS' set to 'RIPS', and 'L.PSIS' set to 'LIPS'. The 'Define ASIS Target Radius for Hip Joint Center Offset' section has a text input field set to '0.000'. The 'Select Tracking Signals' section has a checkbox labeled 'Use Calibration Signals for Tracking' which is checked. At the bottom, there is a '6DOF Cutoff Frequency' section with a text input field set to '0.0'. There are four buttons at the bottom: 'Close Tab', 'Guess Properties', 'Apply', and 'Build Model'.

1. In the **Segments** tab, select *Pelvis* in the Segment Name box
2. In **Segment Type**, select CODA
3. Click on the **Create Segment** button
4. In the **Pelvis** dialog:
 - **Define Calibration Targets**
 - **R.ASIS:** RIAS
 - **L.ASIS:** LIAS
 - **R.PSIS:** RIPS
 - **L.PSIS:** LIPS
 - **Select Tracking Targets:**
 - **Check:** Use Calibration Signals for Tracking
5. Close **CODA Segment Markers** dialog box
6. Click on **Build Model**
7. Click on **Close Tab** before proceeding


3. Modify the Segment Coordinate System

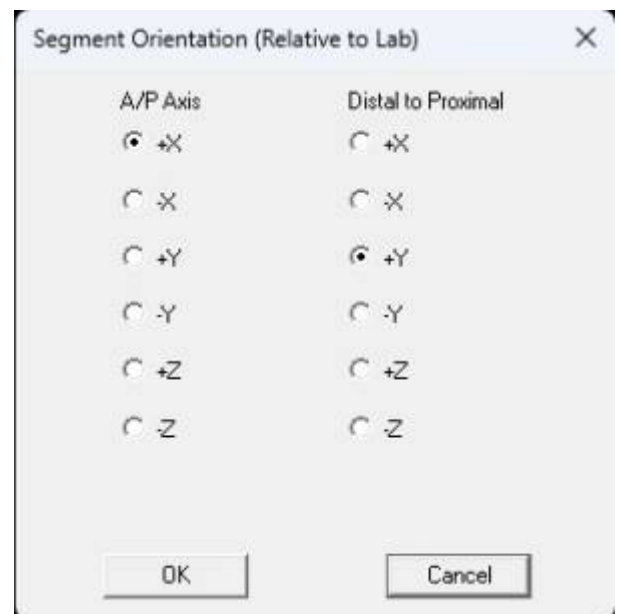

- Define the Segment Orientation as:
 - **A/P Axis:** +X
 - **Distal to Proximal:** +Y

Thorax Segment

This marker set is consistent with the Rizzoli Gait model and the ISB recommendations.

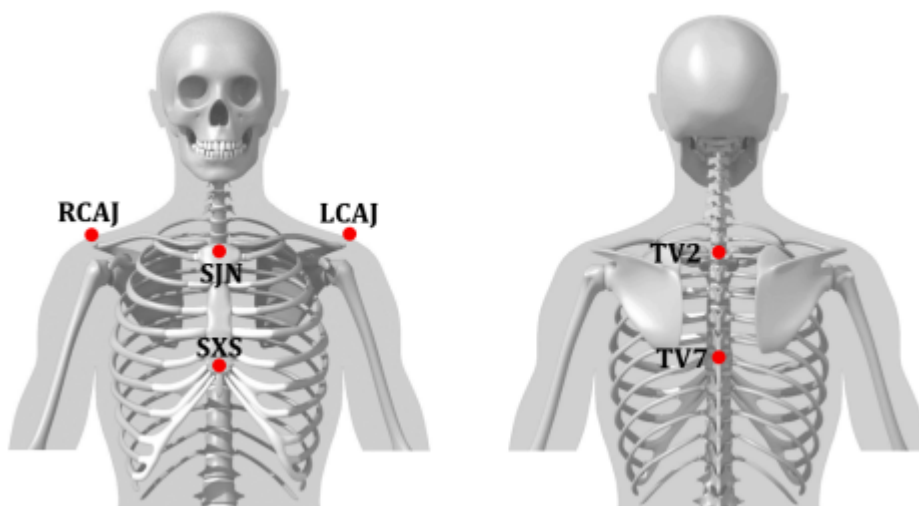

LCAJ/RCAJ (LAR/RA): Left/Right acromion

SJN (IJ): Deepest point of the incisura jugularis

SXS (PX): Xiphoid process, i.e. most caudal point of the sternum

C7V (C7): Spinous process of the seventh cervical vertebrae

TV2 (T2): Second thoracic vertebrae

TV7 (MAI): Midpoint between the inferior angles of the most caudal points of the two scapulae

Thorax Definition

4. Create Thorax/Ab:

The screenshot shows the 'Thorax' dialog box in the Visual3D software. It is divided into several sections:

- Define Proximal Joint and Radius:** Lateral is 'None', Joint Center is 'TV2', Medial is 'None'. Radius (Meters) is $0.5 * \text{DISTANCE}(\text{RCAJ}, \text{LCAJ})$.
- Define Distal Joint and Radius:** Lateral is 'None', Joint Center is 'TV7', Medial is 'None'. Radius (Meters) is $0.5 * \text{DISTANCE}(\text{RCAJ}, \text{LCAJ})$.
- Extra Signal to Define Orientation (if needed):** Location is 'Anterior', Signal is 'SXS'.
- Select Tracking Signals:** A checkbox 'Use Calibration Signals for Tracking' is unchecked. A list of signals includes RFM1, RFM2, RFM5, RFME, RFTC, RIAS, RIPS, RTAM, RTTC, SJN, SXS, TV2, and TV7. SXS, TV2, TV7, and SJN are checked.
- Depth (Meters):** 0.0
- 6DOF Cutoff Frequency:** 0.0

Buttons at the bottom include 'Close Tab', 'Guess Properties', 'Apply', and 'Build Model'.

1. In the **Segments** tab, select *Thorax/Ab* in the Segment Name box.

2. Click **Kinematic Only**

3. Click on the **Create Segment** button


4. In the **Thorax/Ab** tab, enter these values:

- **Define Proximal Joint and Radius**
- **Lateral:** None **Joint:** TV2 **Medial:** None
- **Radius** $0.5 * \text{DISTANCE}(\text{RCAJ}, \text{LCAJ})$
- **Define Distal Joint and Radius**
- **Lateral:** None **Joint:** TV7 **Medial:** None
- **Radius:** $0.5 * \text{DISTANCE}(\text{RCAJ}, \text{LCAJ})$
- **Extra Target to Define Orientation**
- **Location:** Anterior **SXS**
- **Select Tracking Targets:**
- SJN, SXS, TV2, TV7
- Set **Depth(Meters)** to 0.1

5. Click on **Build Model**

6. Click on **Close Tab** before proceeding.

5. Modify the Segment Coordinate System * * *
Define the Segment Orientation as: * **A/P Axis:
 +X

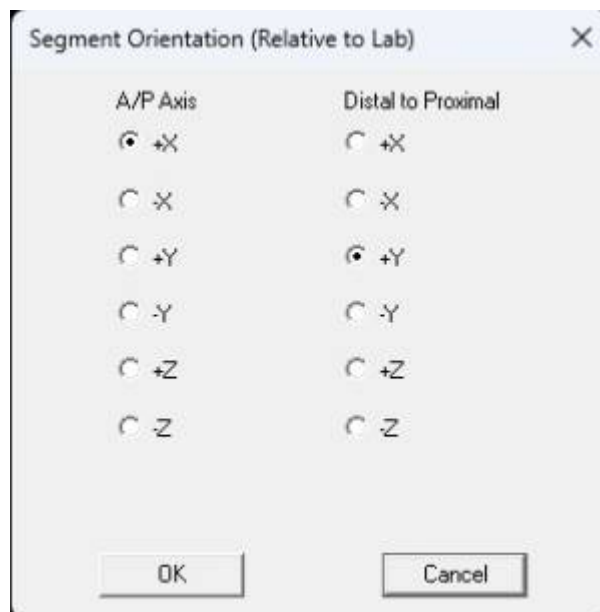


- **Distal to Proximal: +Y**

Change the graphic:

Model File: *thoraciccervicleacromiumtot12.v3g*

Thigh Segment

The RIGHT_HIP/LEFT_HIP landmarks are used to define the thigh segments. These landmarks are created automatically when the Pelvis segment is defined (so the Pelvis must be defined prior to creating the thigh segments).

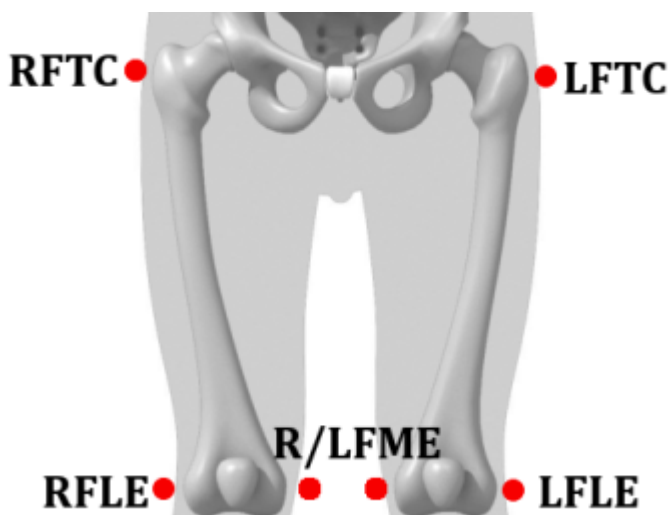

LFTC/RFTC (LGT/RGT): Most Lateral prominence of the greater trochanter

LFKE/RFLE (LLE/RLE): Most lateral prominence of the lateral femoral epicondyle

LFME/RFME (LME/RME): Most medial prominence of the medial femoral epicondyle


Thigh Definition

6. Create Right Thigh:

1. In the **Segments** tab, select Right Thigh in the Segment Name box
2. Click on the **Create Segment** button
3. In the **Right Thigh** tab, enter these values:
 - **Define Proximal Joint and Radius**
 - **Lateral:** None **Joint** RIGHT_HIP **Medial:** None
 - **Radius:** $0.5 * \text{DISTANCE}(\text{RIGHT_HIP}, \text{LEFT_HIP})$
 - **Define Distal Joint and Radius**
 - **Lateral:** RFLE **Joint:** None **Medial:** RFME
 - **Select Tracking Targets:**
 - RIGHT_HIP, RFLE, RFME, RFTC
4. Click on **Build Model**
5. Click on **Close Tab** before proceeding

Shank Segment

The segment coordinate system is different from the [conventional gait model](#) because the shank segment is designed according to markers located on the tibia and fibula, not the femur as with the Conventional Gait Model

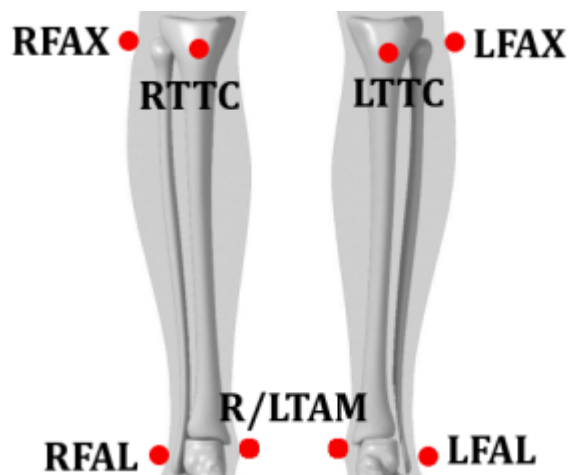

LFAX/RFAX (LHF/RHF): Proximal tip of the head of the fibula

LTTC/RTTC (TT/RTT): Most anterior border of the tibial tuberosity

LFAL/RFAL (LLM/RLM): Lateral prominence of the lateral malleolus

LTAM/RTAM (LMM/RMM): Most medial prominence of the medial malleolus

Shank Landmarks

7. Create RKNE Joint Center:

1. Click **Landmarks** button
2. Click **Add New Landmark** button
3. Create Landmark: RKNE
 - **Landmark Name:** RKNE
 - **Define Orientation Using:**
 - **Starting Point:** RFLE
 - **Ending Point:** RFME
4. Offset Using the Following **AXIAL** Offset: 0.5
5. **Check:** Offset by Percent (1.0 = 100%)

6. **Check:** Calibration Only Landmark

8. Create RANK Joint Center:

Segments | Landmarks | Muscles | Subject Data / Metrics

Landmarks | Functional | Digitizing | RANK

Landmark Name: RANK

Define Orientation Using:

Starting Point: RFAL (Reference)

Ending Point: RTAM (On a line)

*Lateral object: (On a plane)

*Project From: (Projection onto a line or plane)

* = Optional

Existing Segment:

Landmark Offset from Start Point (Reference) or Segment Origin

Offset to Existing Calibration Target or Landmark:

Offset Using the Following ML/AP/AXIAL Offsets

ML:

AP:

AXIAL: 0.5

☒ Offset by Percent (1.0 = 100%) (Meters when not checked)

☒ Calibration Only Landmark (Not generated for assigned motion file(s))

Undo Changes Apply Build Model Close Tab

1. Click **Landmarks** button
 2. Click **Add New Landmark** button
 3. Create Landmark: RANK
 - **LANDMARK Name:** RANK
 - **Define Orientation Using:**
 - **Starting Point:** RFAL
 - **Ending Point:** RTAM
 4. Offset Using the Following **AXIAL** Offset: 0.5
 5. **Check:** Offset by Percent (1.0 = 100%)
 6. **Check:** Calibration Only Landmark
-

9. Create RTTC_PROJ:

The screenshot shows the 'RTTC_PROJ' dialog box within the 'Landmarks' tab. The 'Landmark Name' is set to 'RTTC_PROJ'. Under 'Define Orientation Using:', 'Starting Point' is 'RFAX' (Reference), 'Ending Point' is 'RFAL' (On a line), '*Lateral object' is 'RTAM' (On a plane), and '*Project From' is 'RTTC' (Projection onto a line or plane). The 'Existing Segment' option is not selected. Under 'Landmark Offset from Start Point (Reference) or Segment Origin', 'Offset to Existing Calibration Target or Landmark' is not selected, and 'Offset Using the Following ML/AP/AXIAL Offsets' is selected. The 'ML', 'AP', and 'AXIAL' input fields are empty. The 'Offset by Percent (1.0 = 100%) (Meters when not checked)' checkbox is unchecked. The 'Calibration Only Landmark (Not generated for assigned motion file(s))' checkbox is checked. At the bottom are buttons for 'Undo Changes', 'Apply', 'Build Model', and 'Close Tab'.

1. Click **Landmarks** button
2. Click **Add New Landmark** button
3. Create Landmark: RTTC_PROJ
 - **Landmark Name:** RTTC_PROJ
 - **Define Orientation Using:**
 - **Starting Point:** RFAX
 - **Ending Point:** RFAL
 - **Lateral Object:** RTAM
 - **Project From:** RTTC
4. **Do Not Check:** Offset by Percent (1.0 = 100%)
5. **Check:** Calibration Only Landmark

10. Create RSK_PROX:

The screenshot shows the 'RSK_PROX' dialog box in the software. The 'Landmarks' tab is active. The 'Landmark Name' is 'RSK_PROX'. Under 'Define Orientation Using:', 'Starting Point' is 'RANK' (Reference). 'Targets and/or Landmark:' is selected, with 'Ending Point' as 'RTTC_PROJ' (On a line), '*Lateral object' as an empty field (On a plane), and '*Project From' as 'RKNE' (Projection onto a line or plane). '* = Optional'. 'Existing Segment' is an empty field. Under 'Landmark Offset from Start Point (Reference) or Segment Origin', 'Offset to Existing Calibration Target or Landmark' is an empty field. 'Offset Using the Following ML/AP/AXIAL Offsets' has three empty fields for ML, AP, and AXIAL. 'Offset by Percent (1.0 = 100%) (Meters when not checked)' is unchecked. 'Calibration Only Landmark (Not generated for assigned motion file(s))' is checked. Buttons at the bottom are 'Undo Changes', 'Apply', 'Build Model', and 'Close Tab'.

1. Click **Landmarks** button
2. Click **Add New Landmark** button
3. Create Landmark: RSK_PROX
 - **Landmark Name:** RSK_PROX
 - **Define Orientation Using:**
 - **Starting Point:** RANK
 - **Ending Point:** RTTC_PROJ
 - **Lateral Object:** Leave Blank
 - **Project From:** RKNE
4. **Do NOT Check:** Offset by Percent (1.0 = 100%)
5. **Check:** Calibration Only Landmark

Shank Definition

The screenshot shows the 'Right Shank' tab in a software interface. It contains several sections for configuring the segment:

- Define Proximal Joint and Radius:**
 - Lateral: None
 - Joint Center: RSK_PROX
 - Medial: None
 - Radius (Meters): $0.5 * \text{DISTANCE}(\text{RFLE}, \text{RFME})$
- Define Distal Joint and Radius:**
 - Lateral: RFAL
 - Joint Center: None
 - Medial: RTAM
 - Radius (Meters): 0.043403
- Extra Target to Define Orientation (if needed):**
 - Location: None
- Select Tracking Targets (Ctrl-Left Mouse Click to Multiselect):**
 - ☐ Lab_Origin
 - ☐ Lab_AX
 - ☐ Lab_ML
 - ☐ Pel_ML
 - ☐ VLab_ML
 - ☐ RIGHT_HIP
 - ☐ LEFT_HIP
 - ☐ RPV_AX
 - ☐ RTA_OR
 - ☐ RTA_ML
 - ☐ CV7
 - ☐ LCAJ
 - ☐ LFAL
 - ☐ LFAX
 - ☐ LFCC
 - ☐ LFLE
 - ☐ LFM1
 - ☐ LFM2
 - ☐ LFM5
 - ☐ LFME
- Depth (Meters):** [Empty field]
- Buttons:** Close Tab, Guess Properties, Apply, Build Model

11. Create Right Shank:



1. In the **Segments** tab, select Right Shank in the Segment Name box
2. Click on the **Create Segment** button
3. In the **Right Shank** tab, enter these values:
 - **Define Proximal Joint and Radius**
 - **Lateral:** None **Joint:** RSK_PROX **Medial:** None
 - **Radius:** $0.5 * \text{DISTANCE}(\text{RFLE}, \text{RFME})$
 - **Define Distal Joint and Radius**
 - **Lateral:** RFAL **Joint:** None **Medial:** RTAM
 - **Select Tracking Targets:**
 - RFAL, RFAX, RTAM, RTTC

12. Modify the Segment Coordinate System:

- Define the Segment Orientation as:
- **A/P Axis:** +X
- **Distal to Proximal:** +Y

Foot Segment

The foot segment coordinate system is consistent with some version of the [Conventional Gait Model](#). The foot segment is created using the RANK/LANK landmarks which are described in the Shank Landmarks section

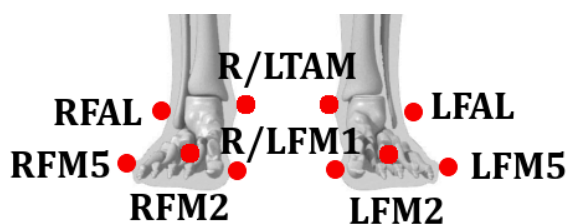

LFAL/RFAL (LLM/RLM): Lateral prominence of the lateral malleolus

LTAM/RTAM (LMM/RMM): Most medial prominence of the medial malleolus

LFCC/RFCC (LCA/RCA): Aspect of the achilles tendon insertion on the calcaneus


LFM1/RFM1 (LFM/RFM): Dorsal margin of the first metatarsal head

LFM2/RFM2 (LSM/RSM): Dorsal aspect of the second metatarsal head

LEFM5/RFM5 (LVM/RVM): Dorsal margin of the fifth metatarsal head

Kinetic Foot


13. Create Right Foot:

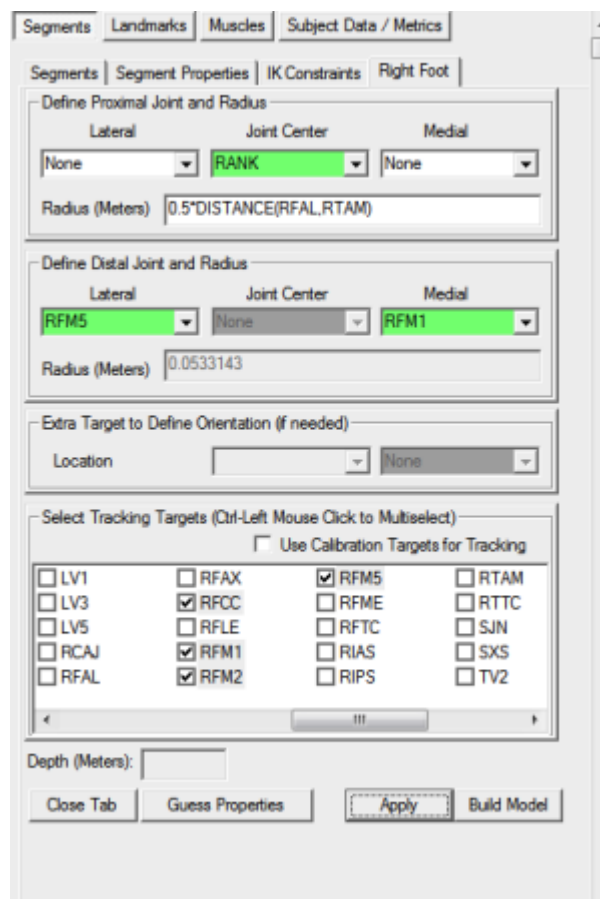

1. In the **Segments** tab, select the Right Foot in the Segment Name box
2. Click on the **Create Segment** button
3. In the **Right Foot** tab, enter these values:
 - **Define Proximal Joint and Radius**
 - **Lateral:** None **Joint:** RANK **Medial:** None
 - **Radius:** $0.5 \times \text{DISTANCE}(\text{RFAL}, \text{RTAM})$
 - **Define Distal Joint and Radius**

- **Lateral:** RFM5 **Joint:** None **Medial:** RFM1
 - **Select Tracking Targets:**
 - RFCC, RFM1, RFM2, RFM5
4. Click on the **Build Model**
 5. Click on **Close Tab** before proceeding
-

14. Modify the **Segment Coordinate System:**

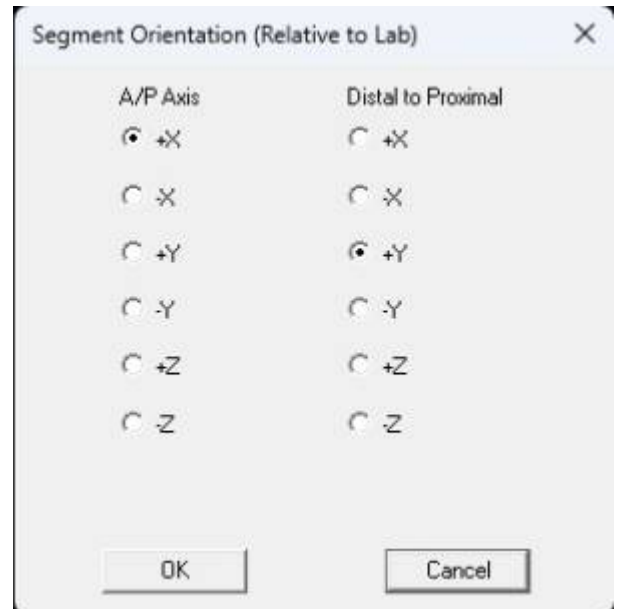

- Define the Segment Orientation as:
 - **A/P Axis:** +X
 - **Distal to Proximal:** +Y
-

Kinematic Foot Landmarks

15. Create RFT_DIST:

The screenshot shows the 'RFT_DIST' landmark creation dialog in the Visual3D software. The 'Landmarks' tab is active. The 'Landmark Name' is 'RFT_DIST'. Under 'Define Orientation Using:', 'Starting Point' is 'RFCC' (Reference). 'Targets and/or Landmark:' is selected, with 'Ending Point' 'RFM5' (On a line), '*Lateral object' 'RFM1' (On a plane), and '*Project From' 'RFM2' (Projection onto a line or plane). '* = Optional'. 'Existing Segment' is empty. Under 'Landmark Offset from Start Point (Reference) or Segment Origin', 'Offset to Existing Calibration Target or Landmark' is empty. 'Offset Using the Following ML/AP/AXIAL Offsets' is selected, with 'ML', 'AP', and 'AXIAL' fields empty. 'Offset by Percent (1.0 = 100%) (Meters when not checked)' is unchecked. 'Calibration Only Landmark (Not generated for assigned motion file(s))' is checked. Buttons at the bottom are 'Undo Changes', 'Apply', 'Build Model', and 'Close Tab'.


1. Click **Landmarks** button
2. Click **Add New Landmark** button
3. Create Landmark: RFT_DIST
 - **Landmark Name:** RFT_DIST
 - **Define Orientation Using:**
 - **Starting Point:** RFCC
 - **Ending Point:** RFM5
 - **Lateral Object:** RFM1
 - **Project From:** RFM2
4. **Do NOT Check:** Offset by Percent (1.0 = 100%)
5. **Check:** Calibration Only Landmark

Kinematic Foot Definition

16. Create Right Virtual Foot:

1. In the **Segments** tab, type *Right Virtual Foot* into the Segment Name box
2. Check the **Kinematic Only** Check Box
3. Click on the **Create Segment** button
4. In the **Right Virtual Foot** tab, enter these values:
 - **Define Proximal Joint and Radius**
 - **Lateral:** None **Joint:** RFCC **Medial:** None
 - **Radius:** 0.01
 - **Define Distal Joint Radius**
 - **Lateral:** RFM5 **Joint:** RFT_DIST **Medial:** None
 - **Select Tracking Targets:**
 - RFCC, RFM1, RFM2, RFM5

17. Modify the Segment Coordinate System:

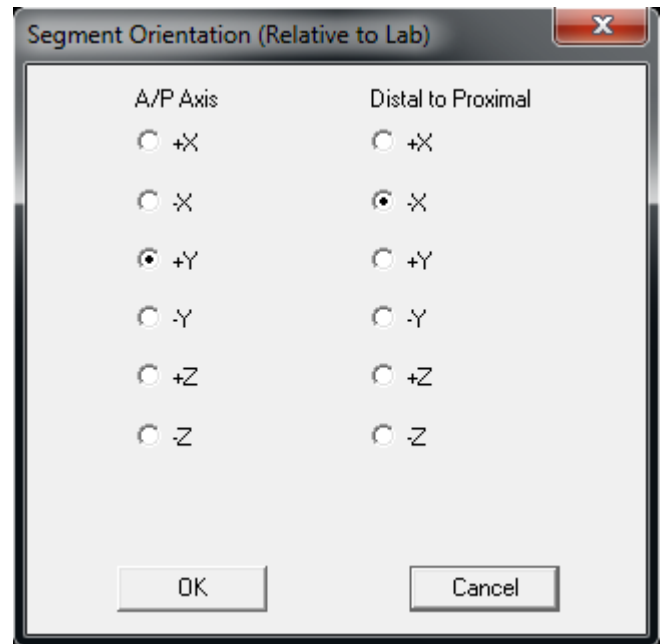


- Define the Segment Orientation as:
 - A/P Axis:** +Y
 - Distal to Proximal:** -X

Virtual Lab

Virtual Lab Landmarks

18. Create Lab_Origin:

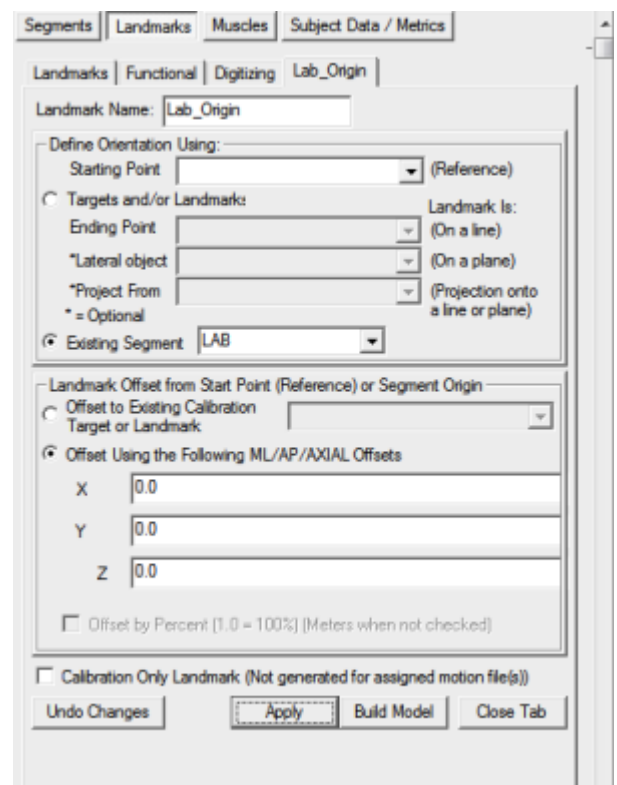

1. Click **Landmarks** button
2. Click **Add New Landmark** button
3. Create Landmark: Lab_Origin
 - **Landmark Name:** Lab_Origin
4. Offset Using the Following **ML/AP/AXIAL** Offsets:
 - **X:** 0.0 **Y:** 0.0 **Z:** 0.0
5. **Do NOT Check:** Offset by Percent (1.0 = 100%)
6. **Do NOT Check:** Calibration Only Landmark

19. Create Lab_AX:

Segments | Landmarks | Muscles | Subject Data / Metrics

Landmarks | Functional | Digitizing | Lab_AX

Landmark Name: Lab_AX

Define Orientation Using:

Starting Point: (Reference)

Targets and/or Landmark:

Ending Point: (On a line)

*Lateral object: (On a plane)

*Project From: (Projection onto a line or plane)

* = Optional

Existing Segment: LAB

Landmark Offset from Start Point (Reference) or Segment Origin

Offset to Existing Calibration Target or Landmark:

Offset Using the Following ML/AP/AXIAL Offsets

X: 0.0

Y: 0.0

Z: 0.1

☐ Offset by Percent (1.0 = 100%) (Meters when not checked)

☐ Calibration Only Landmark (Not generated for assigned motion file(s))

Undo Changes Apply Build Model Close Tab

1. Click **Landmarks** button
2. Click **Add New Landmark** button
3. Create Landmark: Lab_Origin
 - **Landmark Name:** Lab_AX
4. Offset Using the Following **ML/AP/AXIAL** Offsets:
 - **X:** 0.0 **Y:** 0.0 **Z:** 0.1
5. **Do NOT Check:** Offset by Percent (1.0 = 100%)
6. **Do NOT Check:** Calibration Only Landmark

20. Create Lab_ML:

The screenshot shows the 'Lab_ML' dialog box within a software interface. The 'Landmarks' tab is active. The 'Landmark Name' field is set to 'Lab_ML'. Under 'Define Orientation Using:', the 'Starting Point' is set to '(Reference)'. The 'Ending Point' is set to '(On a line)'. The '*Lateral object' is set to '(On a plane)'. The '*Project From' is set to '(Projection onto a line or plane)'. The 'Existing Segment' is set to 'LAB'. Under 'Landmark Offset from Start Point (Reference) or Segment Origin', the 'Offset to Existing Calibration Target or Landmark' is set to 'Offset Using the Following ML/AP/AXIAL Offsets'. The 'X' offset is 0.1, 'Y' is 0.0, and 'Z' is 0.0. The 'Offset by Percent (1.0 = 100%) (Meters when not checked)' checkbox is unchecked. The 'Calibration Only Landmark (Not generated for assigned motion file(s))' checkbox is also unchecked. At the bottom, there are buttons for 'Undo Changes', 'Apply', 'Build Model', and 'Close Tab'.

1. Click **Landmarks** button
2. Click **Add New Landmark** button
3. Create Landmark: Lab_ML
 - **Landmark Name:** Lab_ML
4. Offset Using the Following **ML/AP/AXIAL** Offsets:
 - **X:** 0.1 **Y:** 0.0 **Z:** 0.0
5. **Do NOT Check:** Offset by Percent (1.0 = 100%)
6. **Do NOT Check:** Calibration Only Landmark

21. Create Pel_ML:

Segments | Landmarks | Muscles | Subject Data / Metrics

Landmarks | Functional | Digitizing | Pel_ML

Landmark Name: Pel_ML

Define Orientation Using:

Starting Point: Lab_Origin (Reference)

Targets and/or Landmark:

Ending Point: (On a line)

*Lateral object: (On a plane)

*Project From: (Projection onto a line or plane)

* = Optional

Existing Segment: Pelvis

Landmark Offset from Start Point (Reference) or Segment Origin

Offset to Existing Calibration Target or Landmark:

Offset Using the Following ML/AP/AXIAL Offsets

ML: 0.1

AP: 0.0

AXIAL: 0.0

Offset by Percent (1.0 = 100%) (Meters when not checked)

Calibration Only Landmark (Not generated for assigned motion file(s))

Undo Changes Apply Build Model Close Tab

1. Click **Landmarks** button
2. Click **Add New Landmark** button
3. Create Landmark: Pel_ML
 - **Landmark Name** Pel_ML
 - **Define Orientation Using:**
 - **Starting Point:** Lab_Origin
 - **Existing Segment:** Pelvis
4. Offset Using the Following **ML/AP/AXIAL** Offsets:
 - **X:** 0.1 **Y:** 0.0 **Z:** 0.0
5. **Do NOT Check:** Offset by Percent (1.0 = 100%)
6. **Do NOT Check:** Calibration Only Landmark

22. Create Pel_ML_Proj:

Segments | Landmarks | Muscles | Subject Data / Metrics

Landmarks | Functional | Digitizing | Pel_ML_Proj

Landmark Name: Pel_ML_Proj

Define Orientation Using:

Starting Point: Lab_Origin (Reference)

Ending Point: Lab_ML (On a line)

*Lateral object: (On a plane)

*Project From: Pel_ML (Projection onto a line or plane)

* = Optional

Existing Segment:

Landmark Offset from Start Point (Reference) or Segment Origin

Offset to Existing Calibration Target or Landmark:

Offset Using the Following ML/AP/AXIAL Offsets

ML:

AP:

AXIAL:

☐ Offset by Percent (1.0 = 100%) (Meters when not checked)

☐ Calibration Only Landmark (Not generated for assigned motion file(s))

Undo Changes Apply Build Model Close Tab

1. Click **Landmarks** button
2. Click **Add New Landmark** button
3. Create Landmark: Pel_ML_Proj
 - **Landmark Name:** Pel_ML_Proj
 - **Define Orientation Using:**
 - **Starting Point:** Lab_Origin
 - **Ending Point:** Lab_ML
 - **Project Point:** Pel_ML
4. **Do NOT Check:** Offset by Percent (1.0 = 100%)
5. **Do NOT Check:** Calibration Only Landmark

23. Create VLab_ML:

1. Click **Landmarks** button
2. Click **Add New Landmark** button
3. Create Landmark: VLab_ML
 - **Landmark Name:** VLab_ML
 - **Define Orientation Using:**
 - **Starting Point:** Lab_Origin
 - **Ending Point:** Pel_ML_Proj
4. Offset Using the Following **ML/AP/AXIAL** Offsets:
 - **AXIAL:** 0.1
5. **Do NOT Check:** Offset by Percent (1.0 = 100%)
6. **Do NOT Check:** Calibration Only Landmark

Additional Details

Once the IOR Gait Full Body model has been created, additional items can be calculated specific to the IOR Gait model.

Planar Angles: Compute the orientation of different parts of the thorax relative to one another.

Shoulder LB

Below defines the orientation of the line between the shoulder targets (LCAJ/RCAJ) relative to the trunk segment

Shoulder LB & AR Landmarks

31. Create RTA_OR:

The screenshot shows the 'Landmarks' tab in the Visual3D software. The 'RTA_OR' landmark is being configured. The 'Landmark Name' is 'RTA_OR'. The 'Define Orientation Using' section has 'Starting Point' set to '(Reference)'. The 'Targets and/or Landmark' section has 'Ending Point' set to '(On a line)', '*Lateral object' set to '(On a plane)', and '*Project From' set to '(Projection onto a line or plane)'. The 'Existing Segment' is 'Thorax/Ab'. The 'Landmark Offset from Start Point (Reference) or Segment Origin' section has 'Offset to Existing Calibration Target or Landmark' set to 'Offset Using the Following ML/AP/AXIAL Offsets'. The 'ML' offset is '0.0', the 'AP' offset is '0.0', and the 'AXIAL' offset is '0.0'. The 'Offset by Percent (1.0 = 100%) (Meters when not checked)' checkbox is checked. The 'Calibration Only Landmark (Not generated for assigned motion file(s))' checkbox is unchecked. The 'Apply' button is highlighted.

1. Click **Landmarks** button
2. Click **Add New Landmark** button
3. Create Landmark: RTA_OR
 - **Landmark Name:** RTA_OR
 - **Existing Segment:** Thorax/Ab
4. Offset Using the Following **ML/AP/AXIAL** Offsets:
 - **X:** 0.0 **Y:** 0.0 **Z:** 0.0
5. **Check:** Offset by Percent (1.0 = 100%) (Meters when not checked)
6. **Do NOT Check:** Calibration Only Landmark (Not generated for assigned motion file(s))


32. Create RTA_ML:

The screenshot shows the 'RTA_ML' dialog box within the 'Landmarks' tab. The 'Landmark Name' is set to 'RTA_ML'. Under 'Define Orientation Using:', 'Starting Point' is set to '(Reference)'. The 'Existing Segment' is set to 'Thorax/Ab'. Under 'Landmark Offset from Start Point (Reference) or Segment Origin', 'Offset Using the Following ML/AP/AXIAL Offsets' is selected, with ML set to 0.5, AP set to 0.0, and AXIAL set to 0.0. The 'Offset by Percent (1.0 = 100%) (Meters when not checked)' checkbox is checked. The 'Calibration Only Landmark (Not generated for assigned motion file(s))' checkbox is unchecked. At the bottom are buttons for 'Undo Changes', 'Apply', 'Build Model', and 'Close Tab'.

1. Click **Landmarks** button
2. Click **Add New Landmark** button
3. Create Landmark: RTA_ML
 - **Landmark Name:** RTA_ML
 - **Existing Segment:** THORAX/Ab
4. Offset Using the Following **ML/AP/AXIAL** Offsets:
 - **X:** 0.5 **Y:** 0.0 **Z:** 0.0
5. **Check:** Offset by Percent (1.0 = 100%) (Meters when not checked)
6. **Do NOT Check:** Calibration Only Landmark (Not generated for assigned motion file(s))

Shoulder LB & AR Definitions

33. Create RSh_Th_LB planar angle:

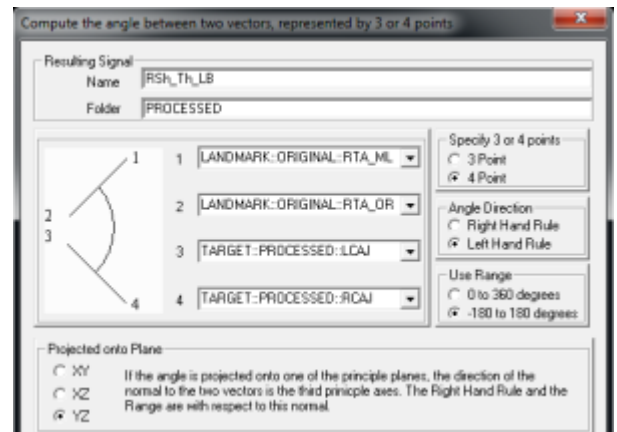


1. Define **Resulting Signal** Name: RSh_Th_LB
2. Calculate a **4 point angle** between the following targets:
 1. LANDMARK::ORIGINAL::RTA_ML
 2. LANDMARK::ORIGINAL::RTA_OR
 3. TARGET::PROCESSED::LCAJ
 4. TARGET::PROCESSED::RCAJ
 - **Angle Direction:** Left Hand Rule
 - **3D Space:** Always 0 to 180 degrees
 - **Projected onto Plan:** YZ
 - **NOTE:** The reference segment will need to be changed to RTA within the text options.

34. Create LSh_Th_LB planar angle:

- When defining the left signal, use same definitions **except** set:
 - **Angle Direction:** Right Hand Rule

35. Create RSh_Th_AR planar angle:

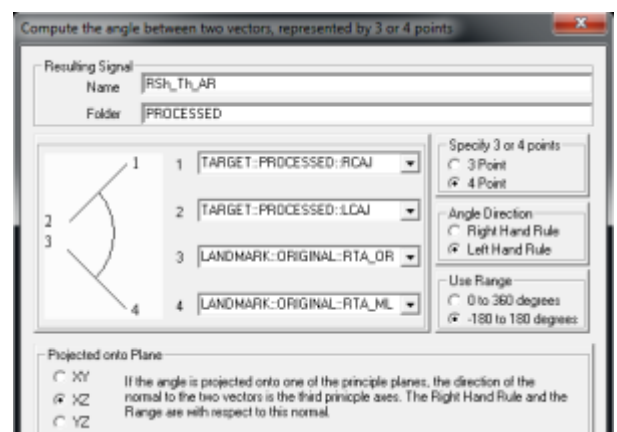

1. Define **Resulting Signal** Name: RSh_Th_AR
2. Calculate a **4 point angle** between the following targets:
 1. TARGET::PROCESSED::RCAJ
 2. TARGET::PROCESSED::LCAJ
 3. LANDMARK::ORIGINAL::RTA_OR
 4. LANDMARK::ORIGINAL::RTA_ML
 - **Angle Direction:** Left Hand Rule
 - **3D Space:** Always 0 to 180 degrees
 - **Projected onto Plane:** XZ
 - **Note:** The reference segment will need to be changed to RTA within the text option

36. Create LSh_Th_AR planar angle:


- When defining the left signal, use same definitions **except** set:
 - **Angle Direction:** Right Hand Rule

Translation

Below defines the translation of the shoulder targets (LCAJ/RCAJ) in the trunk coordinate system

Shoulder Translation Definitions

37. Define RA_Tho_Transl:

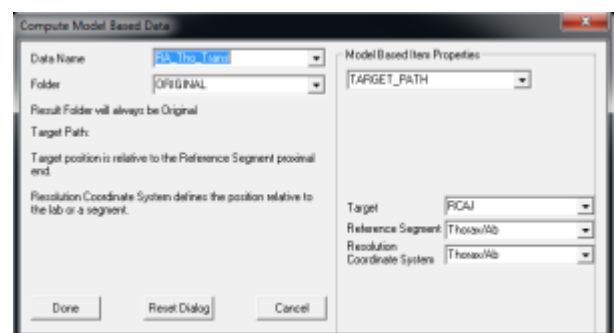

1. Open the **Compute Model Based** dialog
2. Select **TARGET_PATH** from drop down list
 - **Date Name:** RA_Tho_Transl
 - **Target:** RCAJ
 - **Reference Segment:** Thorax/Ab
 - **Resolution Coordinate System:** Thorax/Ab

38. Define LA_Tho_Transl:


- When defining the left signal, use the same definitions **except** set:
 - **Target:** LCAJ

Joint Angles

The Tho_Pel and Tho_Lab angles are described here, while the lower extremity joint angles were created based on the segment coordinate systems described here

Joint Angle Definitions

39. Define the RTho_Pel_Angle:

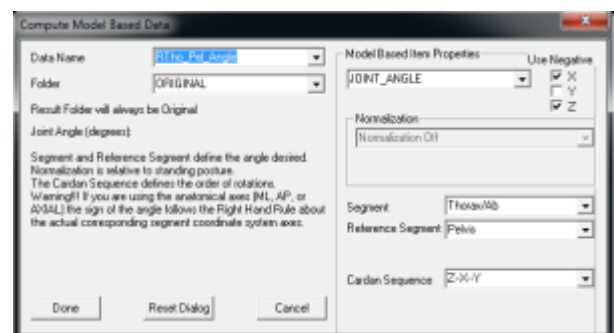


1. Open the **Compute Model Based** dialog
2. Select **JOINT_ANGLE** from drop down list
 - **Data Name:** RTho_Pel_Angle
 - **Segment:** Thorax/Ab
 - **Reference Segment:** Pelvis
 - **Cardan Sequence:** Z-X-Y
3. **Use Negative:**
 - **X:** TRUE **Y:** FALSE **Z:** TRUE

40. Define LTho_Pel_Angle:

- When defining the left signal, use same definitions **except** set:
 - **Use Negative**
 - **X:** FALSE **Y:** TRUE **Z:** TRUE

41. Define the RTho_Lab_Angle:

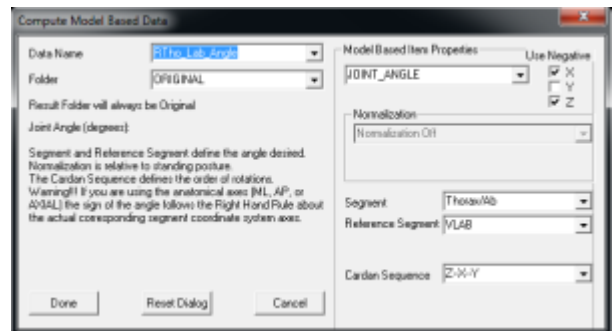


1. Open the **Compute Model Based** dialog
2. Select **JOINT_ANGLE** from the drop down list
 - **Data Name:** RTho_Lab_Angle
 - **Segment:** RThorax/Ab
 - **Reference Segment:** VLab
 - **Carden Sequence:** Z-X-Y
3. **Use Negative:**
 - **X:** TRUE **Y:** FALSE **Z:** TRUE

42. Define LTho_Lab_Angle:

- When defining the left signal, use same definitions **except** set:
 - **Use Negative:**
 - **X:** FALSE **Y:** TRUE **Z:** TRUE

43. Define the RHip_Angle:

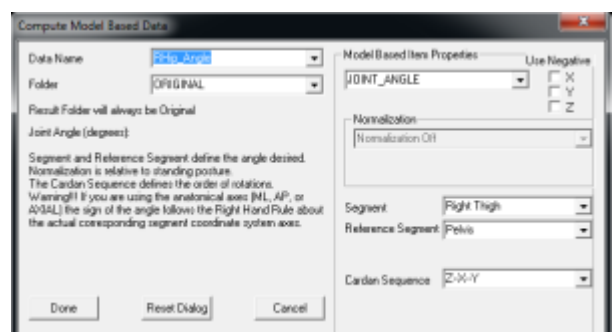

1. Open the **Compute Model Based** dialog
2. Select **JOINT_ANGLE** from drop down list

- **Date Name:** RHip_Angle
- **Segment:** Right Thigh
- **Reference Segment:** Pelvis
- **Carden Sequence:** Z-X-Y


3. Use Negative:

1. **X:** FALSE **Y:** FALSE **Z:** FALSE

44. Define LHip_Angle:

- When defining the left signal, use same definitions **except** set:
 - **Segment:** Left Thigh
 - **Use Negative:**
 - **X:** TRUE **Y:** TRUE **Z:** FALSE

45. Define the RKnee_Angle:

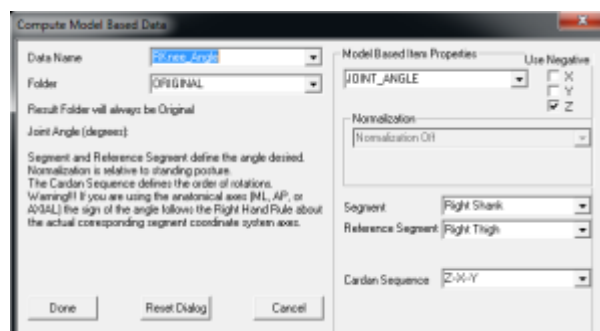


1. Open the **Compute Model Based** dialog
2. Select **JOINT_ANGLE** from drop down list
 - **Data Name:** RKnee_Angle
 - **Segment:** Right Shank
 - **Reference Segment:** Right Thigh
 - **Carden Sequence:** Z-X-Y
3. **Use Negative:**
 - **X:** FALSE **Y:** FALSE **Z:** TRUE

46. Define LKnee_Angle:

- When defining the left signal, use same definitions **except** set:

- **Segment:** Left Shank
- **Reference Segment:** Left Thigh
 - **Use Negative:**
 - **X: TRUE Y: TRUE Z: TRUE**

47. Define the RKnee_Angle:

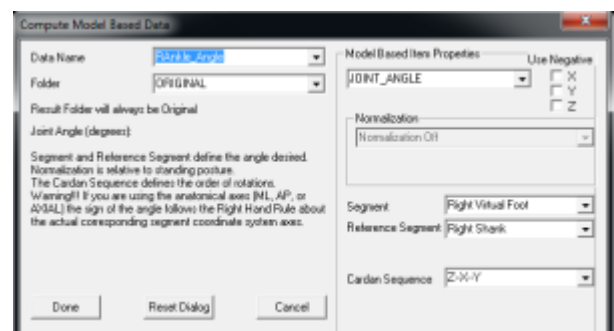

1. Open the **Compute Model Based** dialog
2. Select **JOINT_ANGLE** from drop down list
 - **Data Name:** RAnkle_Angle
 - **Segment:** Right Virtual Foot
 - **Reference Segment:** Right Shank
 - **Cardan Sequence:** Z-X-Y
3. **Use Negative:**
 - **X: FALSE Y: FALSE Z: FALSE**

48. Define LAnkle_Angle:

- When defining the left signal, use the same definitions **except** set:
 - **Segment:** Left Virtual Foot
 - **Reference Segment:** Left Shank
 - **Use Negative:**
 - **X: TRUE Y: TRUE Z: FALSE**

IOR Multi-Segment Foot Model

detailed tutorial focusing on the [IOR Multi-Segment Foot Model](#).

From:
<https://has-motion.com/wiki/> - Wiki Documentation Site

Permanent link:
https://has-motion.com/wiki/doku.php?id=visual3d:tutorials:modeling:ior_gait_full_body_model&rev=1732823208

Last update: **2024/11/28 19:46**

