


Metric_Explicit


This command creates a metric signal explicitly.

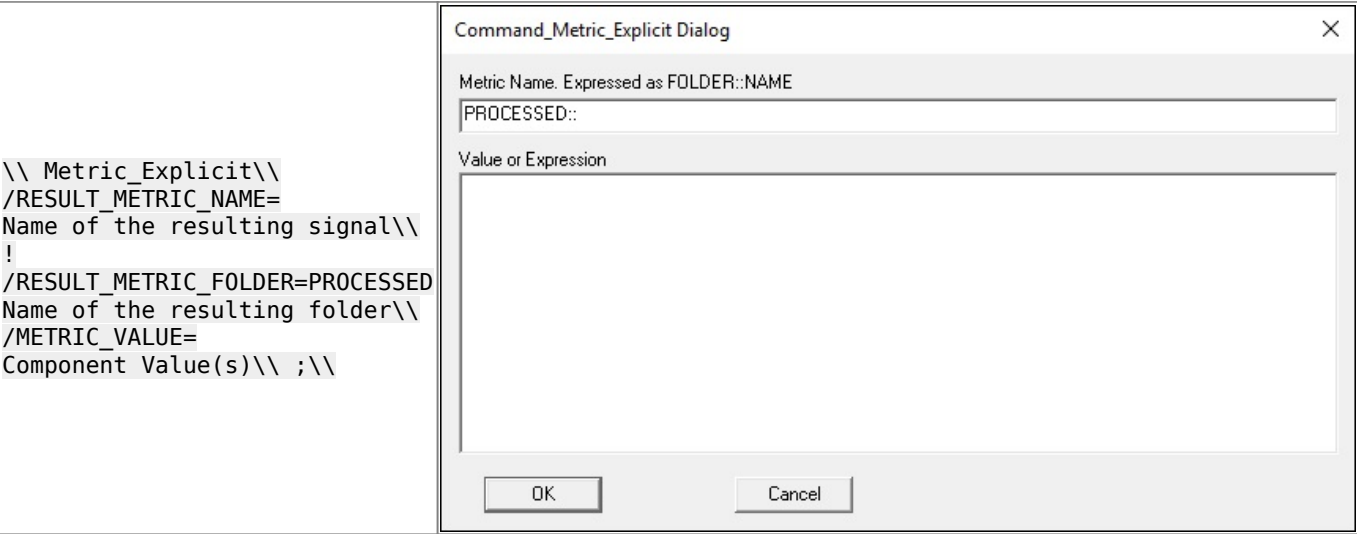


Previous versions of Visual3D labeled this command Explicit_Metric

Example

This example will create a metric signal with 3 component values of 1, 2, 3. The resulting signal will be named **NEW_SIGNAL** and be located in the **OFFSET** folder.

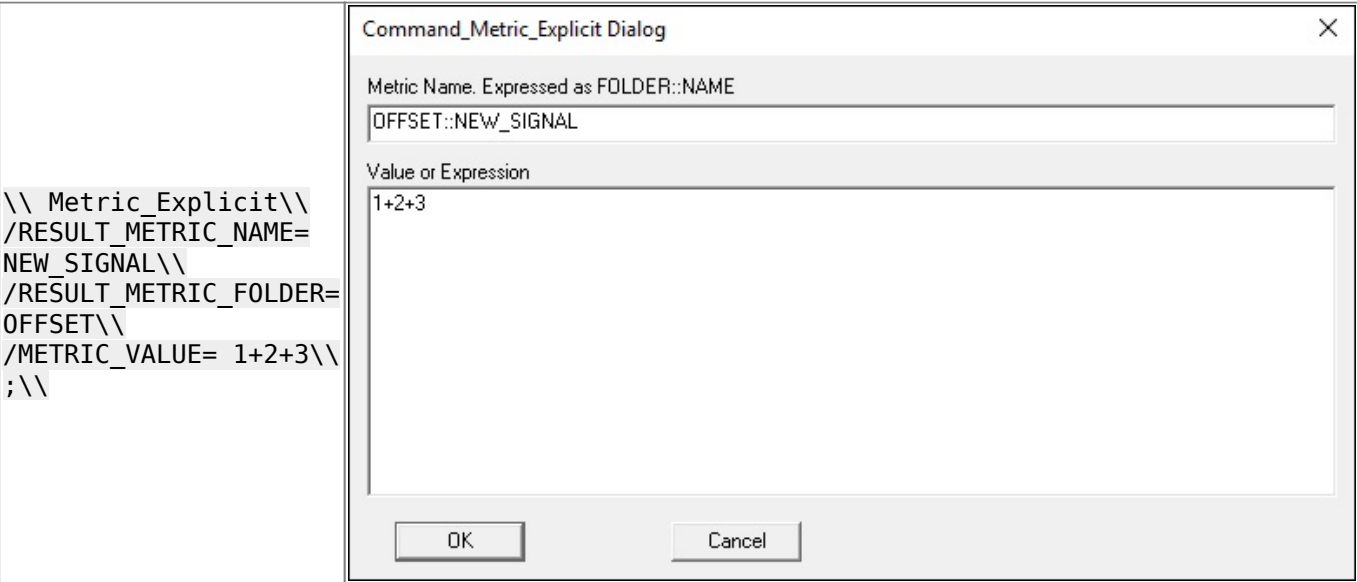

Result

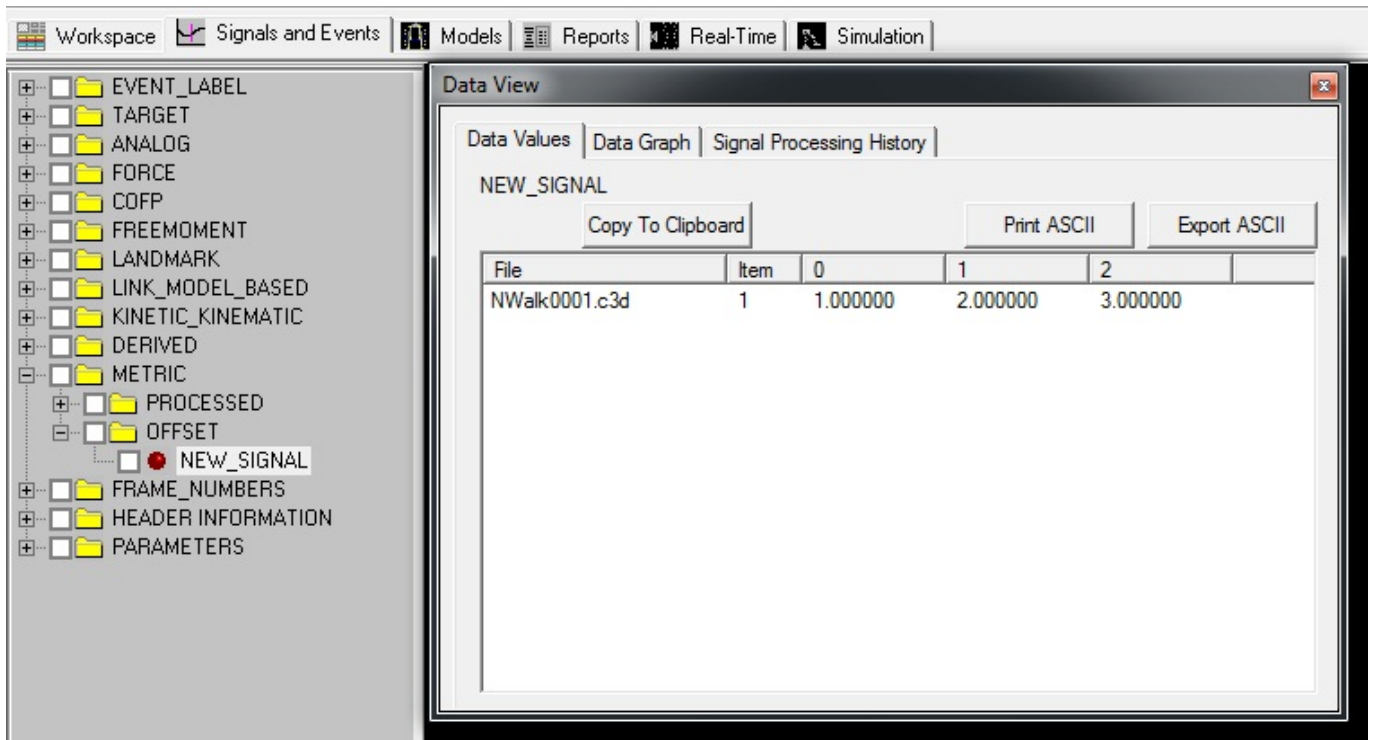

Expressions

In early implementations of this command the values in Metric_Value were a list of components you wanted the metric explicitly set to (see example above), and expressions were not allowed.

In version 6 Metric_Value can be an expression, but this may lead to some confusion.

For example,

Metric_Explicit ! /RESULT_METRIC_FOLDER=PROCESSED /RESULT_METRIC_NAME=X
/METRIC_VALUE=1 ; **Metric_Explicit !** /RESULT_METRIC_FOLDER=PROCESSED
/RESULT_METRIC_NAME=TEST /METRIC_VALUE=METRIC::PROCESSED::X+1 ; The processing results for the second command are:

Metric Name : METRIC::PROCESSED::TEST Metric Expression : VECTOR(METRIC::PROCESSED::X,1)
Metric Value : 1.000000 , 1.000000 ; The second command be re-written as follows:

Metric_Explicit ! /RESULT_METRIC_FOLDER=PROCESSED /RESULT_METRIC_NAME=TEST
/METRIC_VALUE=Add(METRIC::PROCESSED::X,1) ; The processing results for the third command are:

Metric Name : METRIC::PROCESSED::TEST Metric Expression : Add(METRIC::PROCESSED::X,1) Metric Value : 2.000000 ;

From:
<https://has-motion.com/wiki/> - Wiki Documentation Site

Permanent link:
https://has-motion.com/wiki/doku.php?id=visual3d:documentation:pipeline:metric_commands:metric_explicit&rev=1721229065

Last update: 2024/07/17 15:11

