Event Save TPR Signal

Overview

- Describe the functionality of the command

- Placement within pipeline folders

- Use cases

- Requirements for use (i.e gait event labels can only be used if force assignments exist)

Pipeline Command

The pipeline command is shown below as seen in the Visual3D application:

```
Event_Save_TPR_Signal
! /FILE_NAME=
! /PATTERN_FILE=
/SIGNAL_TYPES=
! /SIGNAL_FOLDER=ORIGINAL
/SIGNAL_NAMES=
/PATTERN_EVENT_NAME=
! /PATTERN_EVENT_INSTANCE=1
! /TPR_RADIUS=7
;
```

Command Parameters

The following table shows the command parameters and descriptions:

Parameter	Description

Dialog

The command can be edited in a text editor or in a dialog form. To edit in the dialog pop up form either click on the **Edit** button in the pipeline workshop or double-click on the pipeline command. The dialog is shown below.

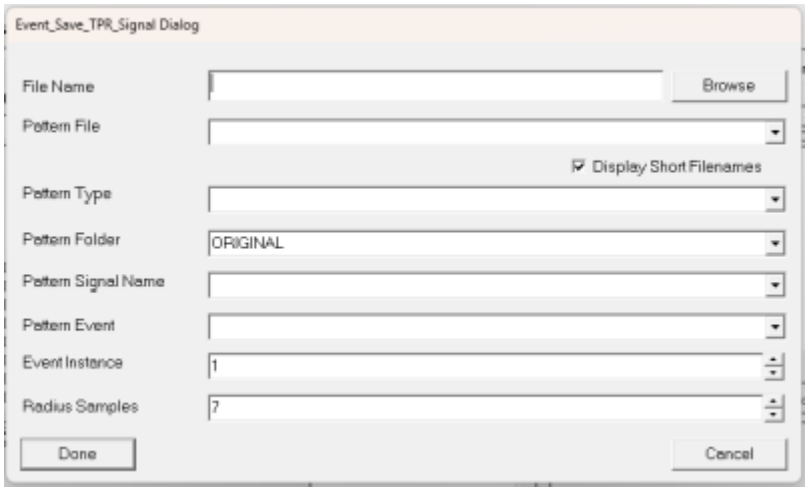

Examples

Simple example

Showing functionality of the command, using a diagram possibly to show output.

Complex example

Combine with other commands and show step-by-step process for frequent use case

Notes

- Important considerations (anything included in the page before the reformat)

From:
https://has-motion.com/wiki/ - **Wiki Documentation Site**

Permanent link:
https://has-motion.com/wiki/doku.php?id=visual3d:documentation:pipeline:event_commands:event_save_tpr_signal&rev=1745595162

Last update: **2025/04/25 15:32**